


RediFloor

## CANTILEVER RACKING

by **Redirack**

- Maximises usage of floor space & utilises vertical warehouse space
- Each rack designed & manufactured to meet your specific needs
- Safe, neat and organised storage of a range of long products
- Robust and durable design to handle demanding environments
- State-of-the-art computer technology used in the design process
- All designs comply with current British Standards & SEMA Codes



# CANTILEVER RACKING

by **Redirack**



## System Design

- Arm loads capable of carrying 5 tonnes
- Rack heights of up to 10m achievable
- Arms locked into position using high-tensile bolts
- Typical arm pitch of 150-200mm
- Base and upright components made from hot-rolled UB section
- Cantilever arm component made from UB or rectangular hollow section
- Arm deflection limited to 1/180 of length
- Upright deflection limited to 1/150 of height
- Maximum allowable weld stress of 280N/mm<sup>2</sup>







Siemens – Sept 09'



# CANTILEVER RACKING

by **Redirack**

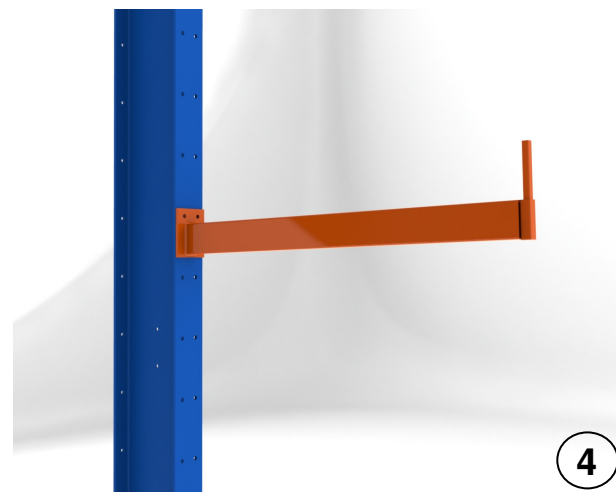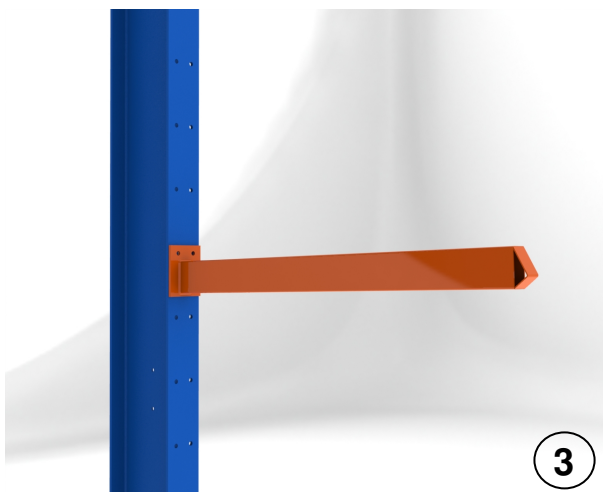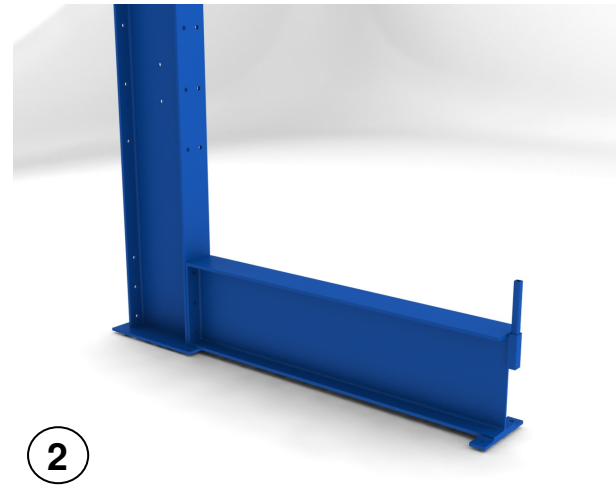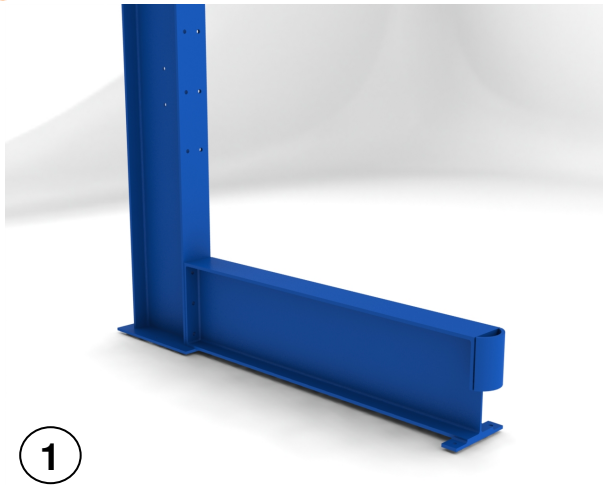

## Accessories

1. Tyre guard
2. Base removable end stop
3. Head guard
4. Cantilever arm removable end stop

Call us now on **01709 584711**

